


Flo Wall

Foster+Partners, 2013

LED wall lamp, in varnish coated aluminium and steel. Head rotates by 300°, arm pivots by 90°+ 90°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity. The maximum energy absorption is 5W.





Product Name (code)

Certificates

Norms

Light sources

Available

Insulation Class

ificates (C E)

Norms EN 60-598-1 (CEI 34-21)

Light sources 1 x 3W-LED [3000K • 250 lm]

Flo Wall (975)

Available 230V (Europe) - 120V (USA - Japan) - 240V (UK)


(fittings come with appropriate plug feeder)

Insulation Class III

Protection Class IP20

Packaging **0,012m³ - 1,15Kg**

Black Soft-touch Matt White Matt Red Matt Yellow Orange Matt Cyan Matt Green Bronze Gunmetal Brushed Nickel

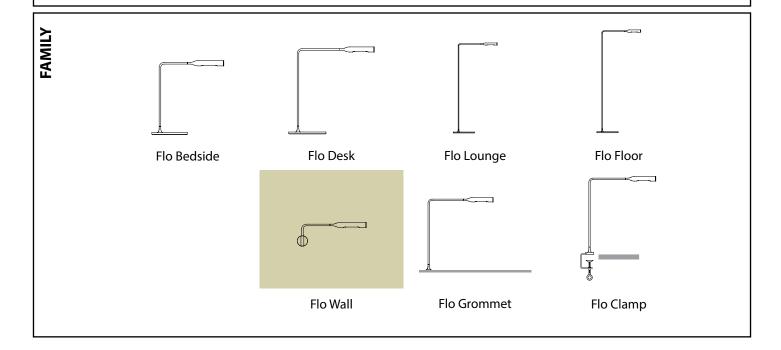




Flo Wall M

Foster + Partners, 2013

LED wall lamp, in varnish coated aluminium and steel. Head rotates by 300°, arm pivots by 90°+ 90°. 3W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity. The maximum energy absorption is 5W. Without feeder.





Product Name (code) Flo Wall M (976) **TECHNICAL DATAS** Certificates Norms EN 60-598-1 (CEI 34-21) Light sources 1 x 3W-LED [3000K • 250 lm] 230V (Europe) - 120V (USA - Japan) - 240V (UK) Available 24VDC feeded light source: AC/DC converter (not included) is required **Insulation Class Protection Class** IP20 **Packaging** 0,012m³ - 1,1Kg

