
# moooi

# Perch Light Branch

**UMUT YAMAC** 

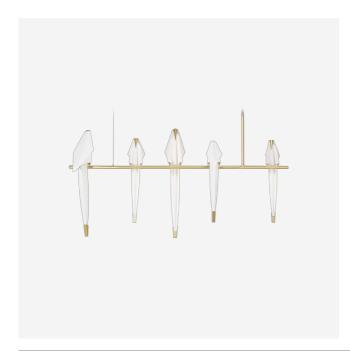

What is more poetic and elegantly captivating than a bird perched on a branch, flirting, singing and celebrating life? We all recognize this image and steal a moment from our precious time to admire this triumph of nature and beauty.

## Detailing



These sunlit birds are free to swing when softly touched. They gently glow and bring along the promise of spring.

### Colours

Brass and white

## Perch Light Branch / Large

**Dimensions** 

112cm | 44.1" 41cm | 16.1"

Product

width 112cm | 44.1" неіднт 53cm | 20.9" дертн 41cm | 16.1" weight netto 9kg | 19.84lbs **Packaging** 

**WIDTH** 34cm | 13.4" **HEIGHT** 53cm | 20.9" **CUBAGE** 0.21m<sup>3</sup> | 7.32ft<sup>3</sup> **LENGTH** 115cm | 45.3" **WEIGHT** 9kg | 19.84lbs

Technical CE

MATERIAL

Steel and aluminium frame with polypropylene (PP) and synthetic paper birds.

ENERGY LABEL LIGHTSOURCE TYPE

Energy Label B LED

LIGHTSOURCE INCLUDED NUMBER OF LIGHTSOURCES

Yes

SHAPEINPUT VOLTAGELinear180-240

FREQUENCY MAX POWER CONSUMPTION

50/60 15W

DIMMABLELAMPHOLDERYesLED (Solid state)

LIFETIME CABLE COLOUR

50000 hours Black

CABLE LENGTH CANOPY

400cm | 157.5"; 1000cm | 393.7" Matching steel cylinder

COLOUR TEMPERATUE CRI

3000 K 80

LIGHT DIRECTION LIGHT OUTPUT
All directions 560 lm

Technical cULus

#### MATERIAL

Steel and aluminium frame with polypropylene (PP) and synthetic paper birds.

**ENERGY LABEL** 

Energy Label B

LIGHTSOURCE INCLUDED

Yes

**SHAPE**Linear

FREQUENCY

50/60

DIMMABLE

Yes

LIFETIME

50000 hours

CABLE LENGTH

400cm | 157.5"

**COLOUR TEMPERATUE** 

3000 K

LIGHT DIRECTION

All directions

LIGHTSOURCE TYPE

LFD

NUMBER OF LIGHTSOURCES

5

**INPUT VOLTAGE** 90-305

MAX POWER CONSUMPTION

20W

LED (Solid state)

CABLE COLOUR

Black

CANOPY

Matching steel cylinder


**CRI** 80

**LIGHT OUTPUT** 560 lm

### Perch Light Branch / Small

#### **Dimensions**







Product

width 73cm | 28.7" неіднт 53cm | 20.9" дертн 36cm | 14.2" weight netto 7kg | 15.43lbs **Packaging** 

**WIDTH** 36cm | 14.2" **HEIGHT** 41cm | 16.1" **CUBAGE** 0.14m<sup>3</sup> | 4.85ft<sup>3</sup> **LENGTH** 93cm | 36.6" **WEIGHT** 7kg | 15.43lbs

#### Technical CE

#### MATERIAL

Steel and aluminium frame with polypropylene (PP) and synthetic paper birds.

#### **ENERGY LABEL**

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED NUMBER OF LIGHTSOURCES

Yes

SHAPEINPUT VOLTAGELinear100-240

FREQUENCY MAX POWER CONSUMPTION

50/60 15W

DIMMABLE LAMPHOLDER

Yes LED (Solid state)

LIFETIME CABLE COLOUR

50000 hours Black

CABLE LENGTH CANOPY

400cm | 157.5"; 1000cm | 393.7" Matching steel cylinder

COLOUR TEMPERATUECRI3000 K80

LIGHT DIRECTION LIGHT OUTPUT
All directions 336 lm

#### Technical cULus

#### MATERIAL

Steel and aluminium frame with polypropylene (PP) and synthetic paper birds.

ENERGY LABEL LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED NUMBER OF LIGHTSOURCES

Yes 3

SHAPEINPUT VOLTAGELinear90-264

FREQUENCY MAX POWER CONSUMPTION

50/60 20W

DIMMABLE LAMPHOLDER

Yes LED (Solid state)

LIFETIME CABLE COLOUR

50000 hours Black

CABLE LENGTH CANOPY

1000cm | 393.7"; 400cm | 157.5" Matching steel cylinder

COLOUR TEMPERATUECRI3000 K80

LIGHT DIRECTION LIGHT OUTPUT

All directions 336 lm

### Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

DIMMER TYPE

1-10V

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.