


REVOLT

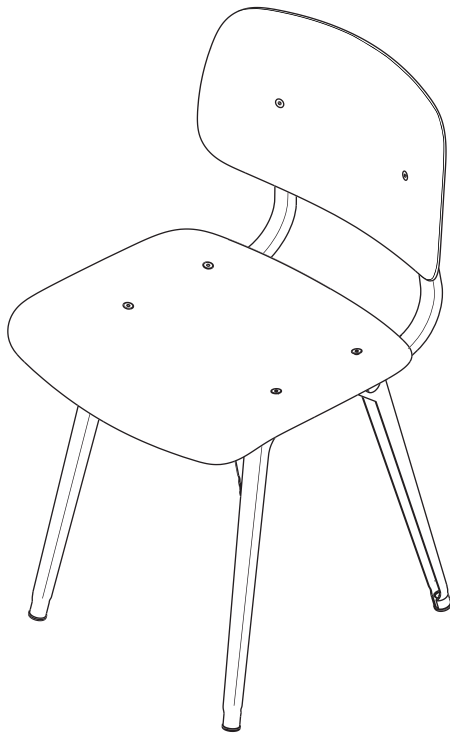


DESIGN BY FRISO KRAMER
FOR AHREND, RELAUNCHED TOGETHER WITH HAY

HAY



DISASSEMBLY OF OLD SEAT AND BACKREST

Unscrew the screws holding the old seat and backrest using an Allen key.
Note: Do not remove the backrest connectors, washers, or screws, nor the seat felt pad, support plate, or washers. Leave them in place.

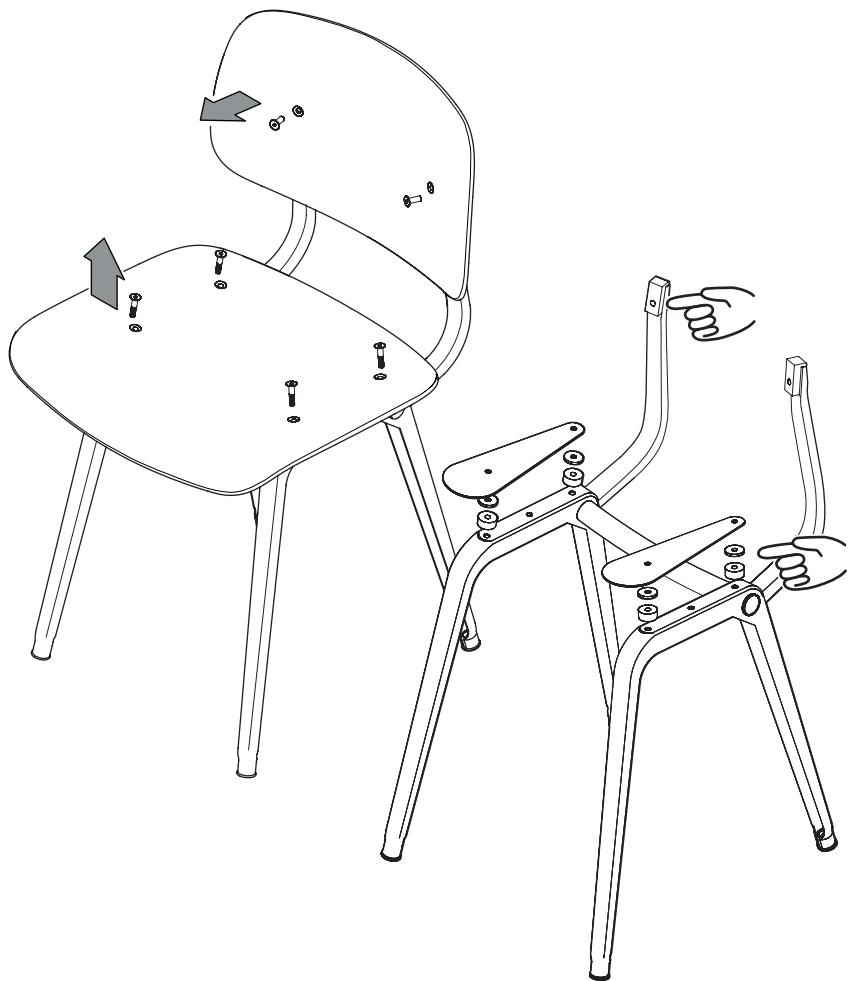

ASSEMBLY OF NEW SEAT AND BACKREST

Ensure all components are in place, then position the new backrest and seat, and fully tighten the screws using an Allen key.

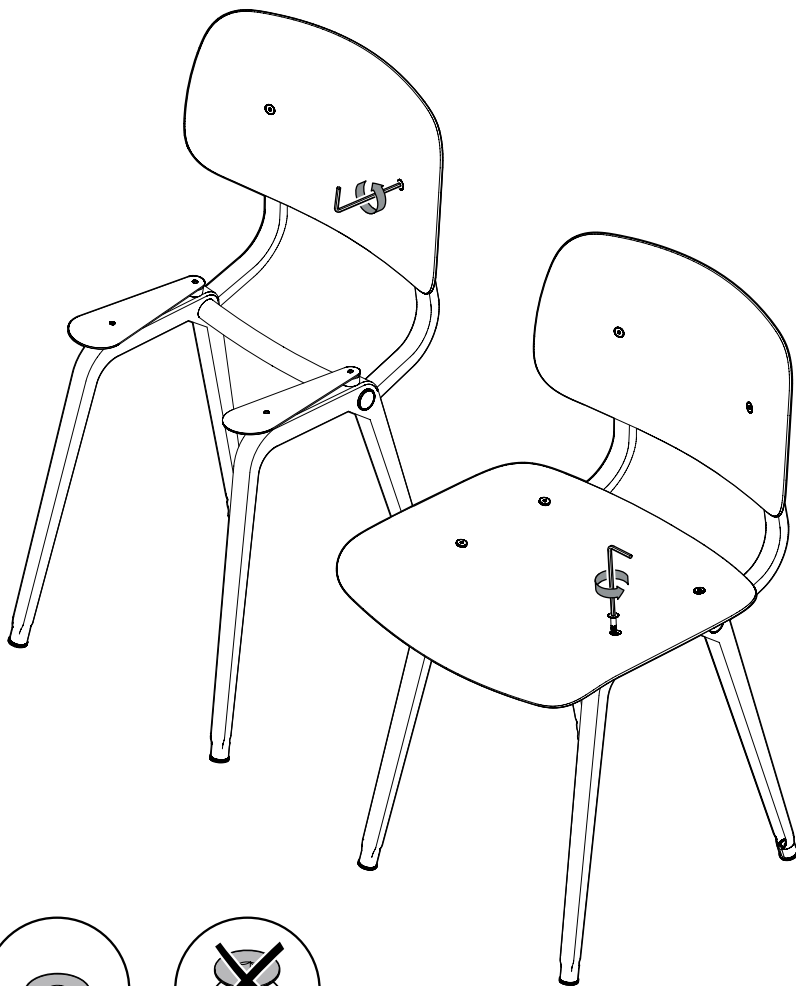

Fully tighten all the screws with the Allen key.

Havnen 3 8700 Horsens Denmark
+45 3164 6000 / hay@hay.com

25/06/2025

HAY

