Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: CITIZEN ELECTRONICS CO., LTD.

Supplier's address: EU sales office, Stephanstraße 3, 60313 Frankfurt am Main, DE


Model identifier: CLU02J-1203C9-272M2U1

T	- 6	10 - 1- 1		
IVna	α T	IIσnt	source:	,
IVDC	vı	HEILL	Jourte.	

Type of light source:									
Lighting technology used:		LED	Non-directional or directional:	NDLS					
Light source cap	Light source cap-type								
(or other electric interface)									
Mains or non-mains:		NMLS	Connected light source (CLS):	No					
Colour-tuneable	Colour-tuneable light source:		Envelope:	-					
High luminance	High luminance light source:								
Anti-glare shield	Anti-glare shield:		Dimmable:	Yes					
	Product parameters								
Parameter		Value	Parameter	Value					
General product parameters:									
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		9	Energy efficiency class	Е					
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 297 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700					
On-mode power (P _{on}), expressed in W		9,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00					
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	83					
Outer dimen-	Height	14	Spectral power dis-	See image					
sions without	Width	14	tribution in the	in last page					
separate con- trol gear, light- ing control		2	range 250 nm to 800 nm, at full-load						

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,458			
		nates (x and y)	0,410			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	0	Survival factor	1,00			
the lumen maintenance factor	0,96					

(a)'-': not applicable; (b)'-': not applicable;

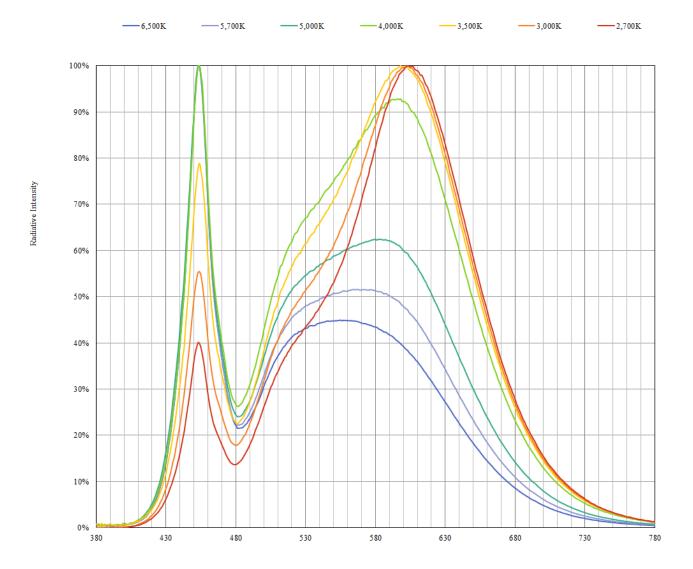

Wavelength [nm]