






INSTALLATION GUIDE ———>

LIGHT-POINT WE BELIEVE IN CREATING LIGHT

At LIGHT-POINT we have one goal - to improve the everyday **life** of people all over the world. Our lamps are designed to provide inspiration, and to solve everyday needs, be it lighting your home **interior**, your office or public spaces. Our **design** is not driven by current trends, since we believe that a classic, minimalistic design with the right function will last for generations and bring **character** into any **environment**.

COMPACT UP/DOWN

Design: Ronni Gol



FOUNDER ———>

Ronni Gol had a decisive influence on how we experience the world around us and interact with one another. We are fortunate enough to live in a world, where we as consumers can choose to switch between night and day according to our whims. In short, we can construct the exact life suiting our individuality, because we are not dependent on daylight to be able to function, and can for instance choose to work at night and sleep during the day. This places great demands on how we approach future light solutions, and the possibilities for innovation when developing a lighting product.






COMPACT UP/DOWN

Art. name	Compact U/D W1	Compact U/D W2	Compact U/D W3
Art. no. white	256330	256335	256337
Art no. black	256331	256336	256338
EAN white	5711389563301	5711389563356	5711389563370
EAN black	5711389563318	5711389563363	5711389563387
RAL white	9003	9003	9003
RAL black	9005	9005	9005
Material	Aluminium	Aluminium	Aluminium



ENERGY LABEL

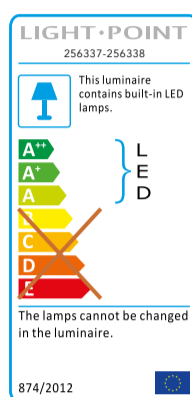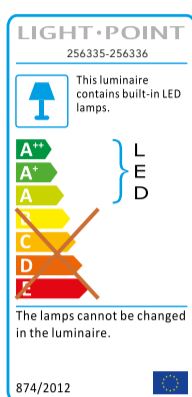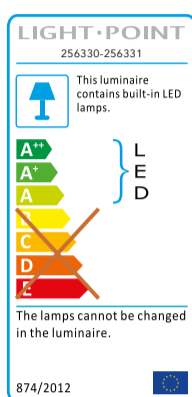

DIMMING



Art. name	Compact U/D W1	Compact U/D W2	Compact U/D W3
Light source	Citizen	Citizen	Citizen
Lifetime	50.000	50.000	50.000
Number of light	2	2	2
Electronic gear	Yes	Yes	Yes
Driver watt	N/A	N/A	N/A
Light source watt	3	6	12
System watt	6	12	12
Voltage	220-240	220-240	220-240
Dimmable	Yes	Yes	Yes
Lumen output	540	1080	1080
Lumen pr. watt	90	90	90
Flux	N/A	N/A	N/A
CCT (K)	3000	3000	3000
RA/CRI	≥ 90	≥ 90	≥ 90
Mac Adam	3	3	3
Light Distribution	Up/Down	Up/Down	Up/Down
Beaming angle	40-105	40-105	40-105
Tilt angle	N/A	N/A	N/A
Cut out mm.	N/A	N/A	N/A
Rotation	N/A	N/A	N/A
Looping	Yes	Yes	Yes

INSTALLATION GUIDE



INSTALLATION INSTRUCTION

- Before installing, make sure the power supply is switched off.
- Follow the steps as the figure for installation or replacement of bulb Step.
 - after holing, pull out the wires.
 - fix the mounting bracket onto the wall with screws.
 - connect the wires to the terminal block.
 - slide the fixture to the mounting bracket
- After finishing every step, tighten the screws, have the fixture fixed, and then connect the power supply.

CLEANING INSTRUCTION

- Before cleaning, ensure that the power supply is switched off.
- Use only a soft cloth to clean the lamp, dampened with mild cleanser if needed for resistant dirt.
- Warning: do not use alcohol or other solvents.

CAUTION:

In case of any doubt, please contact the qualified electrician.

MOUNTING

